

EXPERT SERIES Autolift 4.2

Τετρακόλωνα Ηλεκτροϋδραυλικό 4,2 ton.









Τεχνικά Χαρακτηριστικά

Ικανότητα Ανύψωσης	4200kg
Μέγιστο ύψος ανύψωσης	1850 mm
Μήκος ράμπας ανύψωσης	4808mm
Πλάτος διαδρόμου	512 mm
Απόσταση μεταξύ των κολώνων	2850mm
Απόσταση μεταξύ των ραμπών	912mm
Συνολικό Μήκος	5088mm
Συνολικό Ύψος	2259mm
Συνολικό πλάτος εγκατάστασης	3154mm
Απαιτήσεις αέρα	6-8 bar
Ηλεκτρική συνδεσμολογία	400 V / 3 Ph / 50 Hz
Ισχύς μοτέρ	2.2 kW
Χρόνος Ανύψωσης	approx. 50 sec.
Επίπεδα θορύβου	<75 dB
Ιδίο Βάρος	1870kg
Χρώμα κολώνων	anthracite - RAL 7016
Χρώμα ραμπών	Black - RAL 9017



EXPERT SERIES Autolift 4.2 / 4ΚΟΛΩΝΟ ΑΝΥΨΩΤΙΚΟ

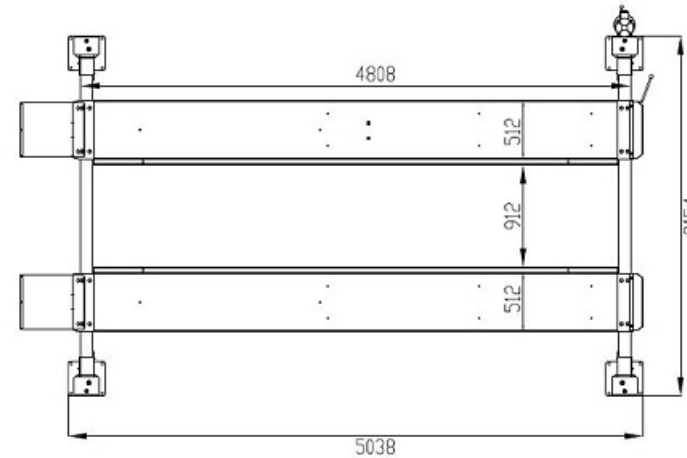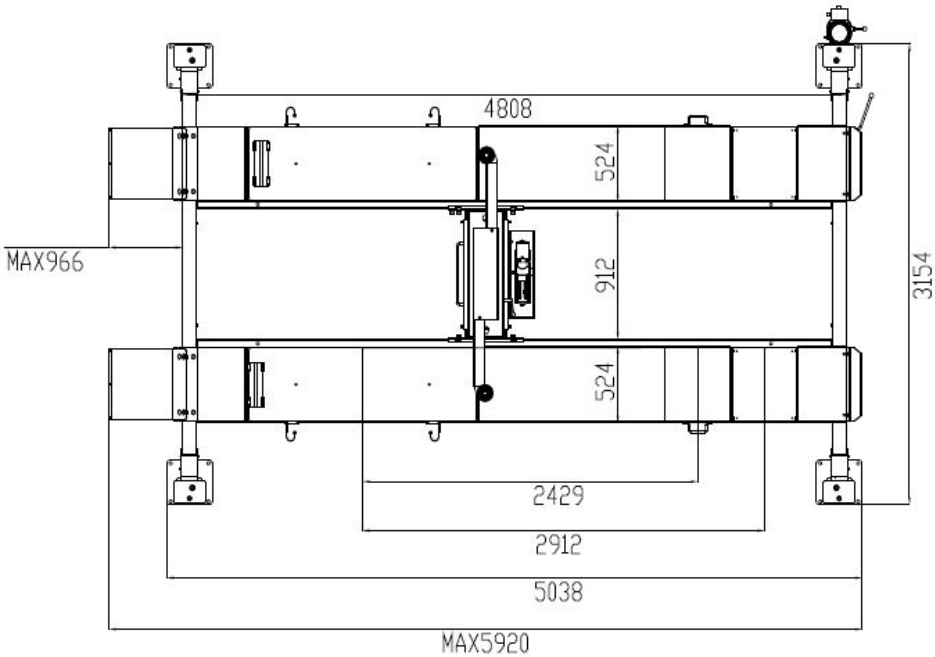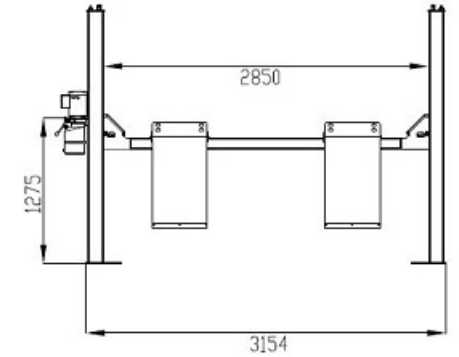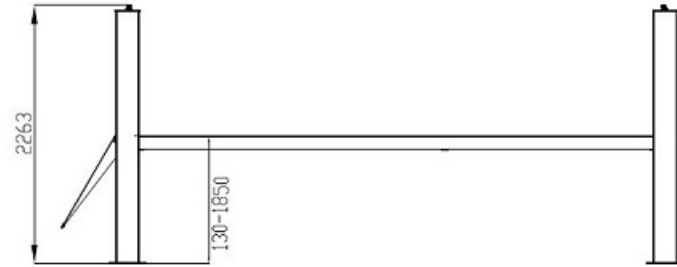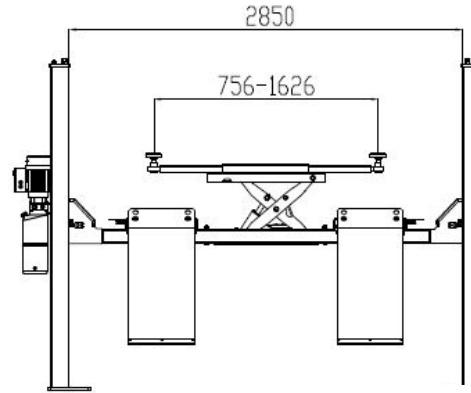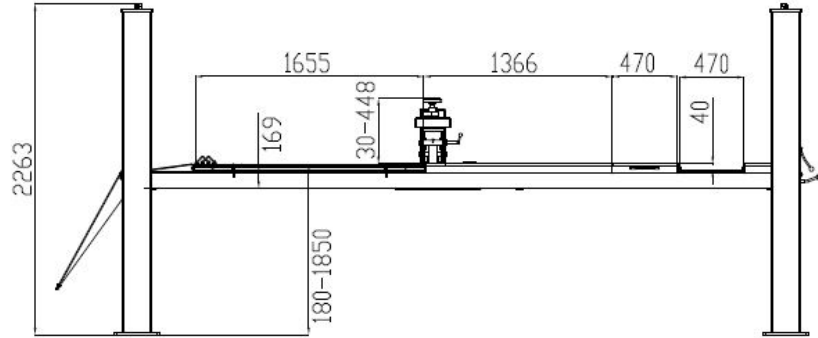

Ηλεκτροϋδραυλικό 4κόλωνο ανυψωτικό για αυτοκίνητα, φορτηγά και ελαφρά φορτηγά

- Χαμηλό ύψος οδήγησης και μεγάλες ράμπες για χαμηλωμένα οχήματα
- Με δυνατότητα για ευθυγράμμιση των τροχών
- Με σύστημα απασφάλισης
- Με αυτόματη προστασία από θραύση συρματόσχοινου
- Βαλβίδα ανακούφισης πίεσης και αντεπίστροφες βαλβίδες
- Μπουτόν ασφαλείας έκτακτης ανάγκης
- Ακουστική προστασία σήματος CE
- γρήγορη ανύψωση και μείωση της ταχύτητας
- Σταθερή ράμπα τερματισμού μπροστά, αυτόματη στο πίσω μέρος
- Πνευματικές ασφάλειες απασφάλισης

Electro-hydraulic 4-post lift for cars, vans and light trucks

The Weber 4-post lift Autolift 4.2 from the Expert series is a real all-round talent in the workshop. With a load capacity of 4200 kg, it is not only suitable for lifting cars and vans, but can even lift small agricultural machinery without any problems. The low drive-on height and the long ramps are also ideal for accommodating longer vehicles. Fully automatic lowering of the lift is possible thanks to the pneumatic unlocking of the safety catches. Since the platform can be finely adjusted and leveled, it can even be used with optionally available accessories for wheel alignment.

suitable for passenger cars, vans and light trucks

low drive-on height and long ramps for lowered vehicles

Can be finely adjusted and leveled for wheel alignment

Safety lock and set-off latches

automatic rope breakage and slack rope protection

Pressure relief valve and pipe rupture safety valve

Operation via button circuit with dead man system

Beeper protection from the CE stop

hydraulic pull cylinder with stable cable pull yoke

fast lifting and lowering speed

Fixed roll-off protection at the front, mobile and automatic roll-off protection at the rear

pneumatic unlocking of the safety latches

EXPERT SERIES Autolift 4.2 / 4 POST LIFT



Technical specifications

Load capacity	4200kg
lifting height max.	1850mm
track length	4808mm
runway width	512mm
column spacing	2850mm
Distance between the rails	912mm
overall length	5088mm
overall height	2259mm
overall width	3154mm
air demand	6-8 bars
electrical connection	400V / 3ph / 50Hz
engine power	2.2kW
lifting time	approx. 50 sec.
noise level	<75dB
Weight	1870kg
color pillar	anthracite - RAL 7016
Color of rails	Black - RAL 9017